


This design is proprietary. The reproduction and / or dissemination without permission is prohibited by in force law.

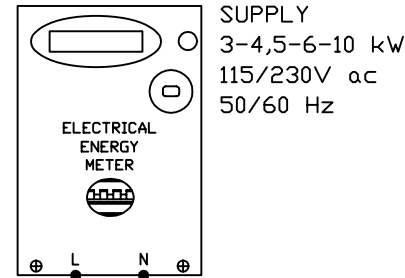

SUPPLY
3-4,5-6-10 kW
115/230V a.c
50/60 Hz

Legend:

- GP - GENERAL PROTECTION DEVICE
- CT - CURRENT TRANSFORMER PRIMARY 75A
- CN - SIGNAL CONVERTER RS485 - USB

COMBINATION OF CAPACITY IN RELATION TO THE NUMBER OF DEVICES INSTALLED		
EKOVAR MASTER N°	EKOVAR SLAVE N°	VALUES AVAILABLE CAPACITY
1	0	35 µF
1	1	70 µF
1	2	105 µF
1	3	140 µF
1	4	175 µF
1	5	210 µF
1	6	245 µF
1	7	280 µF
1	8	315 µF

N.B.:
Each "Ekovar master" you can add up to 8 "Ekovar slave"

